


# HygroMATIK®

member of CAREL group

CAREL

## MultiLance

Steam manifold system for  
extreme short absorption distances

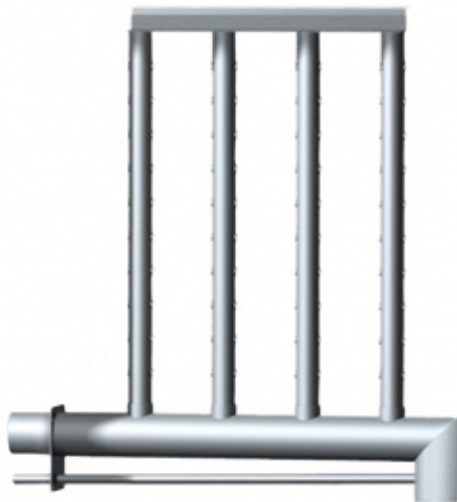

The HygroMatik MultiLance steam manifold systems are designed for use with extremely short absorption distances and are suitable for **electrode and heater element steam humidifiers**, as well as for **steam injection systems**. They can also be used with high flow velocities of up to 8m/s in air ducts.

The MultiLance systems can be installed vertically as well as horizontally in duct widths of 450 mm or above.




Humidification for best conditions

## FLEXIBLE CONFIGURATION FOR EVERY DEMAND


The speciality of the systems is that they can be individually assembled and completely dismantled. Therefore they can be individually adapted to the desired device geometry with maximum flexibility by HygroMatik. This also applies for special installation situations, both in front of and behind obstacles.

### Single lance profile

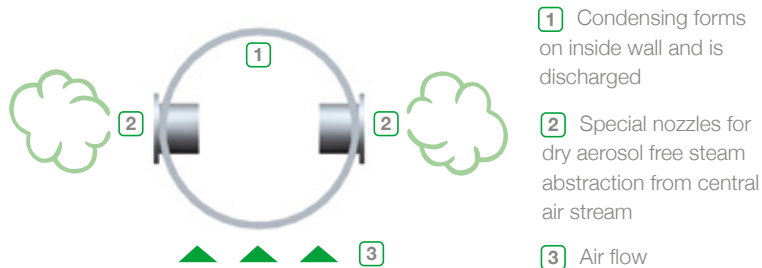

MultiLance systems are simple to install, maintenance-free and the high quality stainless steel components afford a long lifetime. Thanks to the special nozzle format the steam is obtained without aerosols from the middle of the lance, so that the downstream sensitive duct installations can be effectively protected from condensation.

### Lance installation situation

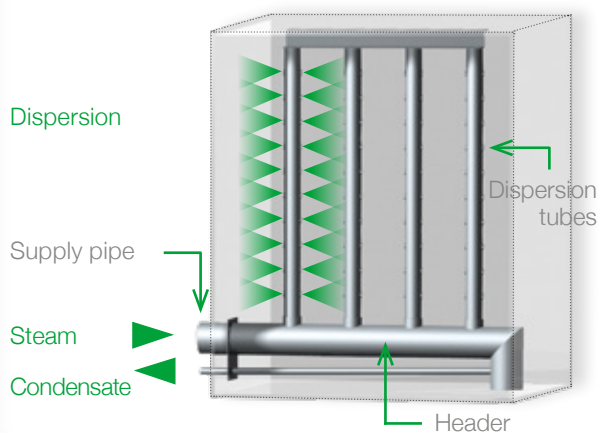

### Design capacity chart

Components	Cross-section [mm]	Steam output [kg/h]
Supply pipe	25	$\leq 18$
	40	$18 \leq 40$
Header	40	$\leq 45$
	50	$46 \leq 115$
	76	$116 \leq 225$
Dispersion tubes	25	$\leq 4$
	40	$4 \leq 16$
	50	$16 \leq 32$

**HygroMATIK**  
member of CAREL group 

#### HygroMatik GmbH

Lise-Meitner-Str. 3  
24558 Henstedt-Ulzburg  
Germany

T +49 4193 895-0  
hy@hygromatik.de  
www.hygromatik.com

