



HygroMATIK®

member of CAREL group

CAREL

Direct room humidification

Electrode steam humidifiers

MiniSteam E

for offices, manufacturing
and storage facilities



HygroMATIK

Optimized room climate due to controlled air humidity

MINISTEAM E (electrodes) STEAM HUMIDIFIERS

DIRECT AND HYGIENIC WITH INTEGRATED VENTILATION UNIT

The HygroMatik MiniSteam E is a steam humidifier for **direct room humidification**. It can be operated with normal drinking water and produces clean, mineral-free steam. Its integrated, smooth-running ventilation unit distributes the hygienic steam evenly in the room and enables humidification even without air conditioning. With a **steam output of 10 and 20 lb/h**, it is particularly suitable for humidifying small and medium-sized offices, museums and exhibition spaces, as well as production and storage areas, for example in the woodworking or food industries.

The housing trough of the MiniSteam E is made of corrosion-resistant stainless steel. The cover can be completely removed for easy and thorough maintenance. For safety reasons, the unit is lockable to prevent unauthorized access. The excellent quality ensures a long service life.



The benefits at a glance

- **Hygienic and reliable humidification** with pure, mineral-free steam
- **Reusable steam cylinder** easy to open, clean and reuse
- **Large-surface electrodes** made of stainless steel, exchangeable without tools
- **Robust blowdown pump** for longer maintenance intervals
- **Optimum energy utilisation** through independent adaptation to the water available
- **Integrated communication protocol** Modbus RTU
- **Convenient operation** with clear LED display

A safe investment – economically sustainable

HIGH-QUALITY, DURABLE AND LOW-MAINTENANCE




INTELLIGENT PROTECTION



MAXIMUM HYGIENE



LONG LIFE



COST SAVING



SUSTAINABLE

MINIMAL MAINTENANCE AND LONG SERVICE LIFE

The proven, high-quality components in our products ensure that the HygroMatik MiniSteam E also offers a long service life and durability.

- **Exchangeable large-area electrodes** made of stainless steel start quickly and last long and the special fastening system QuickFit enables the fast electrode change without tools.
- The **steam cylinder divided in the middle** has an optimized volume - good for long service life.
- A **robust blowdown pump** transports many hardeners into the drain. Even small pieces can be pumped off. This considerably extends the maintenance cycles.
- The housing with the **corrosion-resistant stainless steel tray** can be opened conveniently - all components are easily accessible.
- The unit is **lockable** to prevent unauthorized access.
- **Cylinder maintenance is done quickly** - simply open, clean and reuse without chemicals.

Well-designed, high-quality components are kind to the environment and save you money.



Robust blowdown pump




3.5" Touch Control Remote Display

MAXIMUM EASE OF USE

ALL INFORMATION AT A GLANCE

The MiniSteam E is equipped with a clear LED display. This ensures that you **always have an overview of all important unit and process information**. The simple display symbols provide immediate clarity on the status of the steam humidifier. The control buttons allow quick and intuitive navigation through the clear and easy-to-understand menu. The MiniSteam E can be fitted with an **optional external 3.5" Touch Control Remote display**.

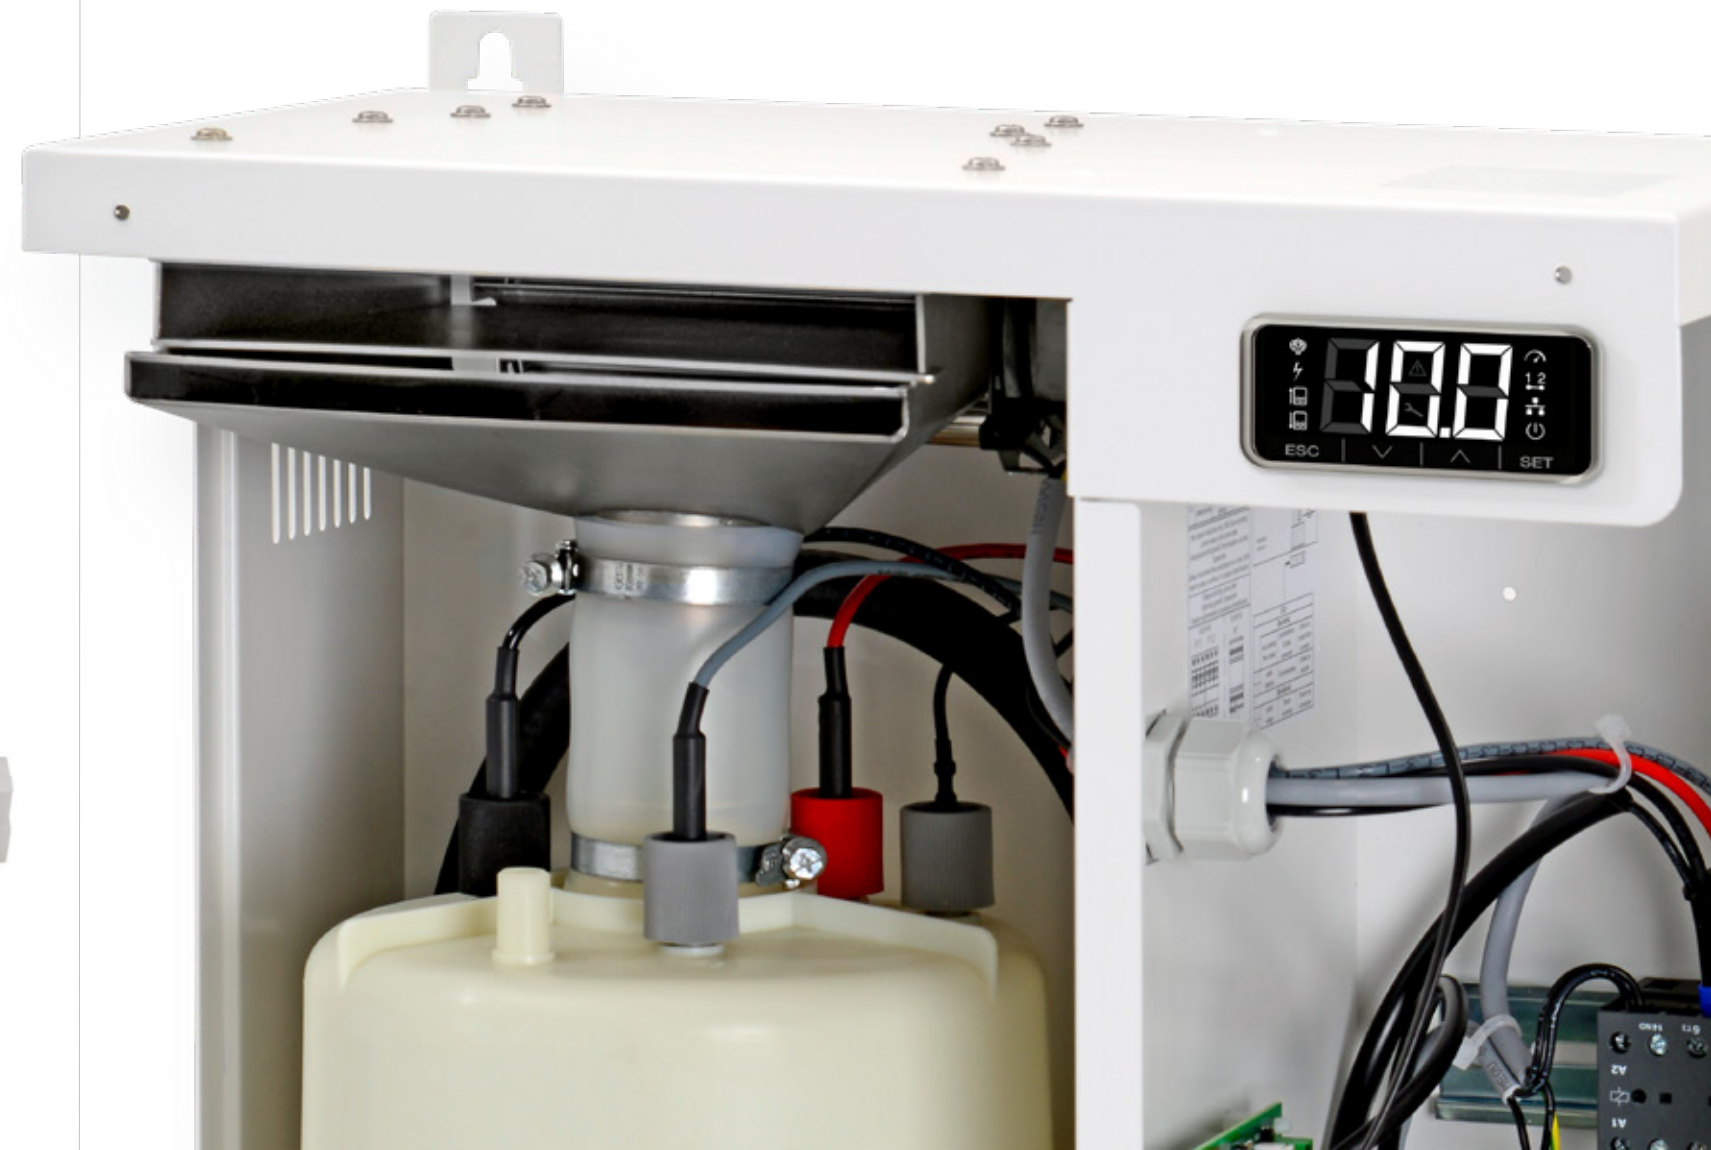

Optimal equipped and expandable as required

SAFETY, COMFORT, AND INTEGRATION

RELIABLE AND SAFE

THANKS TO PRECISE CONTROL TECHNOLOGY

The **HygroMatik MiniSteam E** processes all common control signals and adapts automatically to the respective water quality.

- Continuous or single-stage control
- Integrated PI control
- Automatic system test
- 2 potential-free remote signals
- Integrated galvanically isolated serial interface RS-485 (EIA-485)
- Integrated communication protocol Modbus RTU
- Stand-by blowdown and stand-by heating

Technical data for MiniSteam E (electrodes)

| Electrical supply | Type | MSE05 | MSE10 |
|--|---------------------------------------|--|-------------|
| 208-240 VAC / 1 / N / 50-60 Hz | Steam output [lb/h] | 9.3 - 10.6 | |
| | Steam output [kg/h] | 4.2 - 4.8 | |
| | Rated power input [kW] | 3.1 - 3.6 | |
| | Rated current [A] | 15 | |
| | Circuit protection [A] ⁽¹⁾ | 1 x 20 | |
| 208-240 VAC / 3 / 50-60 Hz | Steam output [lb/h] | 9.9 - 11.4 | 15.9 - 18.3 |
| | Steam output [kg/h] | 4.5 - 5.2 | 7.2 - 8.3 |
| | Rated power input [kW] | 3.4 - 3.9 | 5.4 - 6.2 |
| | Rated current [A] | 9.4 | 15 |
| | Circuit protection [A] ⁽¹⁾ | 3 x 15 | 3 x 15 |
| 440-480 VAC / 3 / 50-60 Hz | Steam output [lb/h] | 10.6 - 11.5 | 21.2 - 23.0 |
| | Steam output [kg/h] | 4.8 - 5.2 | 9.6 - 10.4 |
| | Rated power input [kW] | 3.6 - 3.9 | 7.2 - 7.8 |
| | Rated current [A] | 4.7 | 9.4 |
| | Circuit protection [A] ⁽¹⁾ | 3 x 10 | 3 x 10 |
| Empty weight [kg / lb] | | 15 / 33 | |
| Operational weight [kg / lb] | | 20 / 44 | |
| Dimensions W x H x D ⁽²⁾ [inch] | | 15.4 x 23.4 x 10.0 | |
| Water installation | | Tap water of varying qualities 1 to 10 bar / 14.5 - 145 PSI, with 3/4" connection | |

Subject to technical changes.

⁽¹⁾ Multiply power input by 1.1 after full blowdown. Consider overload capacity of automatic breakers. If necessary, select the next higher rating.

⁽²⁾ Outer dimensions of width and depth. Height incl. drain connection.



VARIOUS OPTIONS

FOR INDIVIDUAL CONFIGURATION

The **HygroMatik MiniSteam E** can be adapted specifically to the requirements of the various application areas by means of individual equipment and configuration with numerous options. This means that almost any project requirement can be optimally met. If necessary, these options can also be retrofitted at a later time.


- **SuperFlush:** The innovative cylinder flushing device significantly extends cylinder service life
- **HyFlow:** The DVGW-compliant system separator protects drinking water from contamination
- **HyCool:** The integrated waste water cooling ensures that the waste water temperature does not exceed 140 °F
- **Choice of electrode shapes and materials:** Enables optimum adaptation to different water qualities
- **Touch Control Remote:** 3.5" display for external control (including housing for surface mounting)



SuperFlush lime management



HyFlow system separator

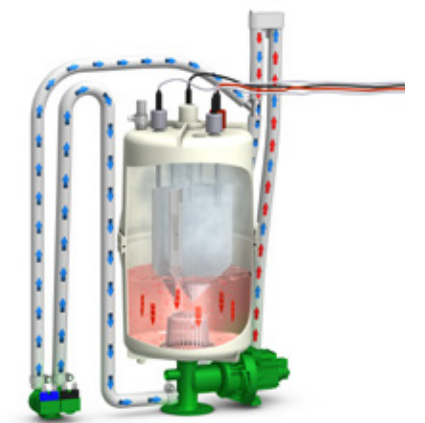

HyCool wastewater cooling

Our service for 100% customer satisfaction

- Long availability for replacement parts
- Technical hotline +49 4193 895-293
or hotline@hygromatik.com
- HygroMatik distributes in more than 45 countries
- Operating manuals, planning data and information
on workshop events available online at
www.hygromatik.com

HygroMATIK®

member of CAREL group



HygroMatik GmbH

Lise-Meitner-Str. 3
24558 Henstedt-Ulzburg
Germany

T +49 4193 895-231
hy@hygromatik.de
www.hygromatik.com

HygroMatik USA

PO Box 10084
Lancaster, PA 17605
USA

T 717 299 5679
hy@hygromatik.com
www.hygromatik.com

